

# RED ALERT™ AERATOR CONTROL PANELS

WWW.REDALERTCONTROLS.COM




## 2-YEAR WARRANTY

UL Type 4X enclosure



3-position toggle switch

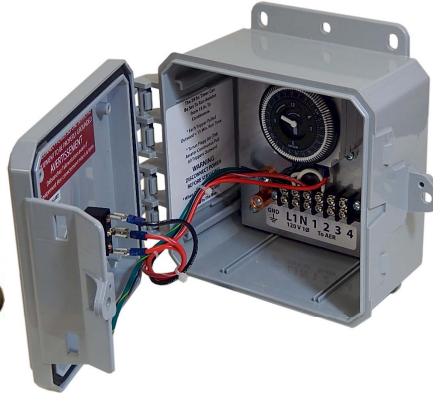

**MODEL: P101-2**

Toggle switch settings:

On/Auto	Normal operation
Off	Turn off power to aerator
Continuous	Continuous operation (timer bypass)

Red Alert™ 24-hour time control technology joins a dependable electromechanical design with industrial grade plastics.

Designed for both indoor and outdoor use, Red Alert timers are a superior choice for time control on most aerator types including submersible, shaft-style, submersible, compressor or blower aerators.

Our timers provide wiping contacts and zinc plated screw terminals to resist corrosion and withstand environments where metal timers rust and fail.

## Features

- Continuous 24-hour operation, 15-minute or greater increments, or off settings
- 20-amp rated
- For indoor and outdoor use

## Models

**P101FA-2**

Exclusively designed for the Flagg-Air 340HT aerators. (Includes 7-amp breaker)  
Replaces Jet\* and Norweco/Singular\* control panels.

**P101-2**

For compressor or blower style units and aerators up to 20-amp.


UL Type 1 enclosure



Warning light

3-position toggle switch

Mini-breaker

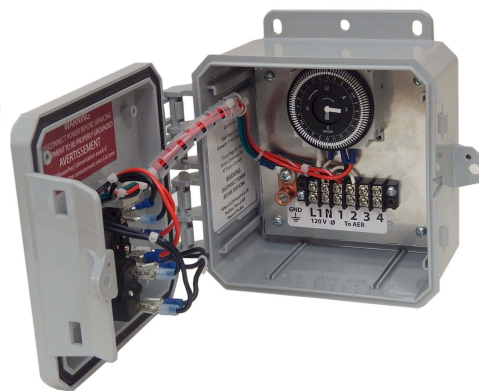

**MODEL: P101FA-2**

Unit includes 3-position toggle switch, warning light and reset switch.

Toggle switch settings:

On/Auto	Normal operation
Off	Turn off timer
Continuous	Continuous operation

7-amp mini-breaker included.



Order/Questions : 800-536-5564

Septic Services, INC.

# RED ALERT<sup>TM</sup> AERATION TIMERS

Red Alert<sup>TM</sup> aeration timers are designed for both indoor and outdoor use. Red Alert timers are a superior choice for time control on most aerator types including shaft-style, submersible, compressor or blower aerators, and for any application that requires mini-breaker (7 amp) capability.

## Features

- Continuous 24-hour operation, 15-minute or greater increments, or off settings
- 15 minute intervals to continuous run
- UL type 4X enclosure (P101-2)
- UL type 1 enclosure (P101FA-2)

## Applications

Indoor and outdoor use.

## Includes

7 amp mini-breaker (P101FA-2 Only)

## Specifications: P101FA-2

Rating	20 Amp / 120 Volt
Unit Dimensions	6.5"W x 6.5"H x 4"D
Unit Weight	4 lbs.

Unit includes control timer, warning light, reset switch, and 3-position toggle switch.

## Specifications: P101-2

Rating	20 Amp / 120 Volt
Unit Dimensions	6.5"W x 7.75"H x 4"D
Unit Weight	4 lbs.

Unit includes control timer and 3-position operation toggle switch.

Septic Services, Inc. reserves the right under its product improvement policy to change construction or design detail without obligation regarding previous models and to furnish equipment when so altered without reference to illustrations or specifications used here.

Septic Services, Inc. • 7059 Hwy 47 (shipping) P.O. Box 632 (mail) • Union, Missouri 63084 • Tel: 800-536-5564 Fax 636-583-6432 • sales@septicsew.com  
Copyright © Septic Services, Inc. 2016 [www.septicsew.com/store](http://www.septicsew.com/store) • [www.redalertcontrols.com](http://www.redalertcontrols.com)  
All rights reserved.